


# HSCBs

## Standard Family Code IR 3000 SERIES VV

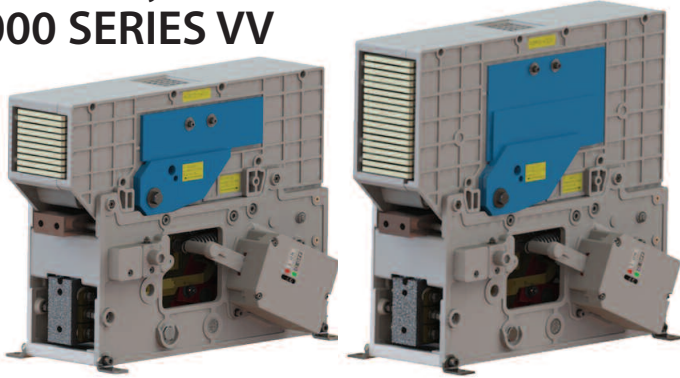

### Description

DC single pole, magnetic blowout, trip free, air circuit breaker. The closing mechanism is motor-operated independent type while the holding mechanism is magnetic type, provided with holding coil. The breaker is equipped with a direct acting over-current trip device, which may be either unidirectional or bi-directional. Reference standard IEC 60077.


Family Code			
Voltage	Holding System	Thermal Current	
		1500 A	3000 A
900 V	Holding Coil	IR 3015 VV 09L	IR 3030 VV 09L
		IR 3015 VV 09M	IR 3030 VV 09M
1800 V		IR 3015 VV 18M	IR 3030 VV 18M

Type	IR3000 VV
Number of Poles	1 NO
Mounting Position	Vertical
Control Voltage Rating $U_c$ [Vdc]	24 - 36 - 48 - 72 - 110 <sup>1</sup>
Auxiliary Contact Blocks	5 N.O. + 6 N.C.
Block Type	Reed
Arc chute Material	Ceramic
Main Contacts tips Material	AgSnO <sub>2</sub>
Arcing Contacts tips Material	AgW
Electric Diagram HC	42870370B
Layout Drawing HC	42870555C


<sup>1</sup> To be specified in order phase.

Electrical Characteristics	09L	09M	18M
Rated Operational Voltage [V <sub>dc</sub> ] <sup>1</sup>	900	900	1800
Max Operational Voltage [V <sub>dc</sub> ]	1000	1000	2000
Rated Insulation Voltage [U <sub>Nm</sub> ]	2300	2300	2300
Conventional Free Air Thermal Current [A] at 40°C <sup>2</sup>	1500 / 3000 <sup>1</sup>		
Rated Short Circuit Making and Breaking Capacity / Time constant [kA/ms]			
$\tau_1$	30 / 0	50 / 0	30 / 0
$\tau_2$	30 / 15	32.5 / 15	30 / 15
$\tau_3$	30 / 50	30 / 50	30 / 40
$\tau_4$	30 / 150	30 / 150	30 / 100
Rated Duty Cycle	0 - 20s - CO - 60s - CO		
Peak arc voltage x U <sub>Nm</sub> [ $\hat{U}_{arc}$ ]	up to 3 x U <sub>Nm</sub>		
Standard direct acting trip device [kA] <sup>1</sup>			
Setting Range 1	1 ÷ 1.8		
Setting Range 2	1.5 ÷ 2.7		
Setting Range 3	2.2 ÷ 4		
Setting Range 4	3.3 ÷ 6		
Blow Out Circuit Type	Coil		

<sup>2</sup> Device cabled according IEC 60947

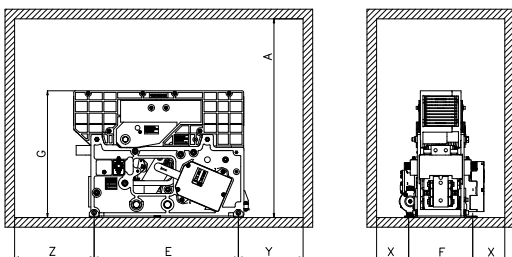

IR 3000 VV Low Power

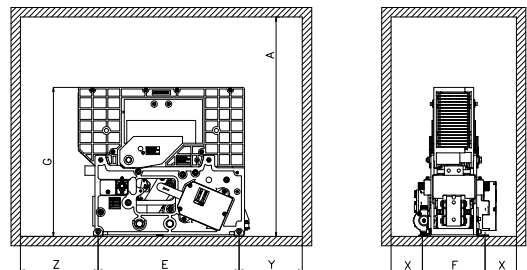

IR 3000 VV Medium Power

Minimum clearances [mm] from <sup>3</sup> :								
Rated Operational Voltage [V <sub>dc</sub> ]	A <sup>4</sup>	E	F	G	X	Y <sup>4</sup>	Z <sup>4</sup>	
900	Metal Parts	620	450	200	396	100	202	248
	Plastic Parts	520			50	150	198	
1800	Metal Parts	700			476	100	202	248
	Plastic Parts	600			50	150	198	

<sup>3</sup> Reduced distances should be approved by M.S.

<sup>4</sup> These quotes are referred to a 50 % surface opening grid.

For further technical information, please contact M.S. or refer to the product technical specification



Microelettrica Scientifica

### Mechanical Characteristics

Mechanical Endurance (cycles)	6x50000
Electrical durability [In @ Un ]	4x200
Shock and Vibrations (IEC61373)	Cat.1 - Class B
Weight LP / MP [kg]	44 / 54

### Control Circuit

Control Voltage Range	0.7Uc ÷ 1.25Uc
Operated by	D.C. Motor
Holding closed by	Holding Coil
Peak closing power and time [W x s]	400 x 0.01
Nominal closing power and time [W x s]	250 x 1.5

### Holding Coil version

Nominal holding power @ 20°C [W]	50
Nominal opening power @ 20°C [W]	0
Controlled opening time [ms]	< 50

### Auxiliary Contacts

Type	Reed Contacts (Vacuum Technology)
Voltage [V <sub>dc</sub> ]	24 / 36 / 48 / 72 / 110
Rated Current [A]	5
Maximum Breaking Power with Inductive Load $\tau=2\text{ms}$ [W]	120
Maximum Breaking Current with Inductive Load $\tau=2\text{ms}$ [A]	3
Maximum Breaking Voltage with Inductive Load $\tau=2\text{ms}$ [V]	250
Minimum let-through Current at 24Vdc [mA]	5

### Environmental Conditions

Stock Temperature Range	-50°C ÷ +85°C
Operational Temperature Range	-30°C ÷ +70°C
Pollution Degree - Overvoltage Category (EN 50124-1)	PD3 - OV4
Clearance in air [mm]	14
Creepage distance [mm]	32.2
Comparative Tracking Index (CTI)	>600
Max Altitude without Performance Derating [m]	2000
Humidity <sup>5</sup>	10 ÷ 95% RH

<sup>5</sup> According to EN 50125-1

