



IR3000F Vertical

IR3000F line

Applications

DC Substation

Industry

The IR3000F series are single pole, magnetic blow out, trip free, air circuit breakers.

The closing mechanism is an independent motor operated type.

The IR3000 Circuit Breaker is held closed by holding coil or by permanent magnet device and is equipped with a direct acting over-current trip device which may be either unidirectional and bidirectional.

The arc chute is made in ceramic material for a longer life and reduced maintenance.

The use of arching contacts ensure a long duration in electrical life.

The breaker conforms to IEC61992; IEEE C37-14; IEEE C37-16.

Different solutions of arc chutes help the cubicle designers for the optimization of the space.

HSCBs



IR3000F 900



IR3000F 1800

Type	U _{max} [V]	I [A]	W [mm]	H [mm]	L [mm]
IR3000F 900	900	3000	220	395	530
IR3000F 1800	1800	3000	220	478	530
IR3000F Vertical	up to 1800	3000	220	720	530

IR4000 line

Applications

On the vehicle roof

Under vehicle frame

Inside the loco cubicle

DC Substation

Industry

The IR4000 Line is single pole air High Speed Circuit Breakers for DC applications with rated voltages of 900, 1800 or 3600 Vdc and thermal currents up to 4,5kA.

Based on ceramic fins technology, IR4000 are designed to protect the downstream power circuits from overcurrent and short circuit.

The IR4000 Circuit Breaker is an independent motor operated type and held close by holding coil or permanent magnet. It is the latest generation of the well-known IR6000 line because it integrates all improvements resulting from a long experience in many worldwide rail and industry applications. It replaces easily the first generation IR6000 for both electrical and mechanical aspects.

A compact and robust platform allows to withstand very harsh conditions in order to face all working requirement for onboard applications (IR4000V) as well as fixed installations (IR4000F).

The IR4000 Line is the right solution if high or very high power load protection is required. In order to fit limited space available on vehicles the IR4000 can be mounted:

- Inside the cubicle in vertical mounting position : IR4000VV
- Under the frame as well as on the roof in horizontal mounting position: IR4000VH


Standard Characteristics

- Thermal current rating 3000 or 4500A.
- Rated voltages of 900, 1800 or 3600 Vdc
- Single pole, magnetic blow out, trip free, air circuit breakers
- The closing motor is an independent motor operated type.
- Held closed by holding coil or permanent magnet device.
- Bidirectional direct acting over-current trip device.
- Ceramic arc chute guarantees a longer life and reduced maintenance.
- Arcing contacts ensure a long duration in electrical life.
- Reed type auxiliary contacts

Customization Available

- Monodirectional direct acting over-current trip device.
- Dual voltage arc chute
- IP65 Metal enclosure for roof or under frame application
- Fast opening device for fixed application

HSCBs

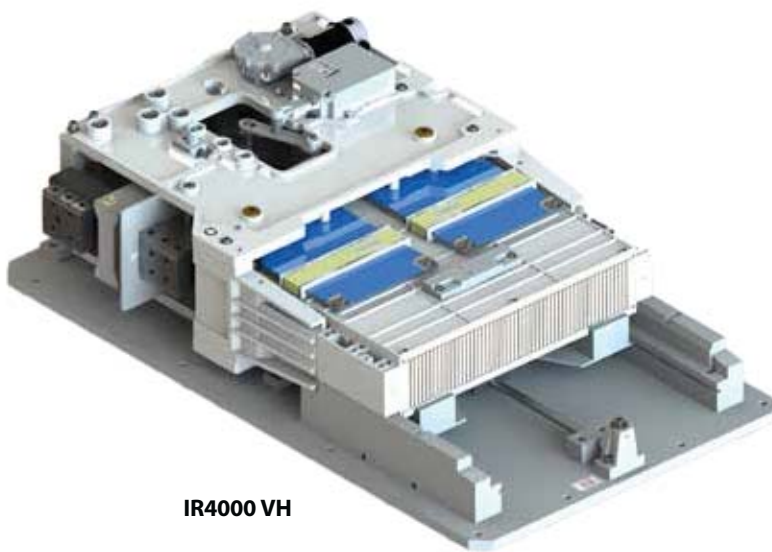

IR4000 VH




IR4000 VV and IR4000 F

				Max Breaking current (kA/ms) according to IEC61992		
Fixed Application	IR4000 F Line	Holding System	I _{th} (A) @ 40°C	U _e (Vdc) = 900Vdc	U _e (Vdc) = 1800Vdc	U _e (Vdc) = 3600Vdc
	IR4030FC09M	Holding Coil	3000	125 / 100	-	-
	IR4030FP09M	Permanent Magnet				
	IR4045FC09M	Holding Coil	4500			
	IR4045FP09M	Permanent Magnet				
	IR4030FC18M	Holding Coil	3000	-	90 / 63	-
	IR4030FP18M	Permanent Magnet				
	IR4045FC18M	Holding Coil	4500			
	IR4045FP18M	Permanent Magnet				
	IR4030FC36M	Holding Coil	3000	-	-	70 / 63
	IR4030FP36M	Permanent Magnet				
	IR4045FC36M	Holding Coil	4500			
	IR4045FP36M	Permanent Magnet				



IR6000F Mechanical

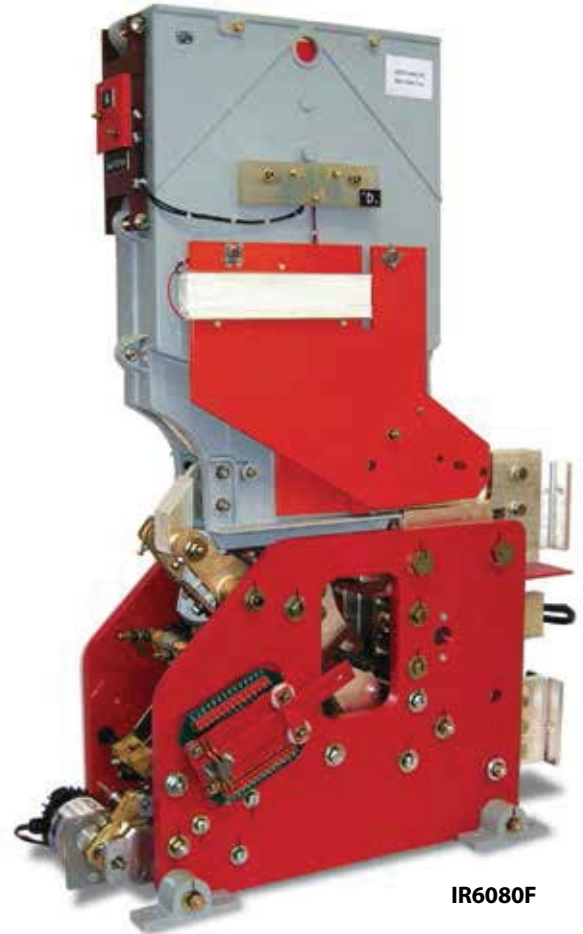

IR6080F

IR6000F line

Applications

DC Substation

Industry

The IR6000 series are single pole, magnetic blow out, trip free, air circuit breakers.

The closing mechanism is an independent motor operated type.


The IR6000 Circuit Breaker is held closed by holding coil or by permanent magnet device and is equipped with a direct acting over-current trip device which may be either unidirectional and bidirectional.

The arc chute is made in ceramic material for a longer life and reduced maintenance.


The use of arcing contacts ensure a long duration in electrical life.

The breakers can be used in single voltage or dual voltage applications, where multisystem solution is required (ex 1800/3600V).

HSCBs

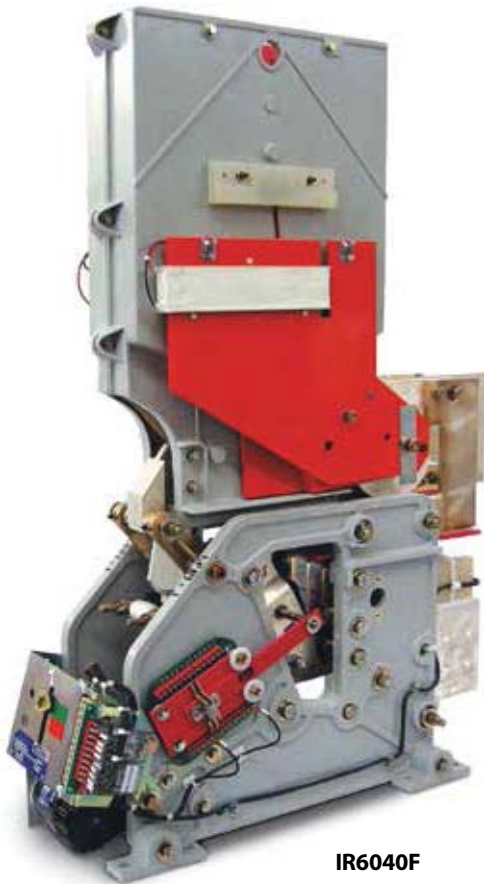

IR6040F

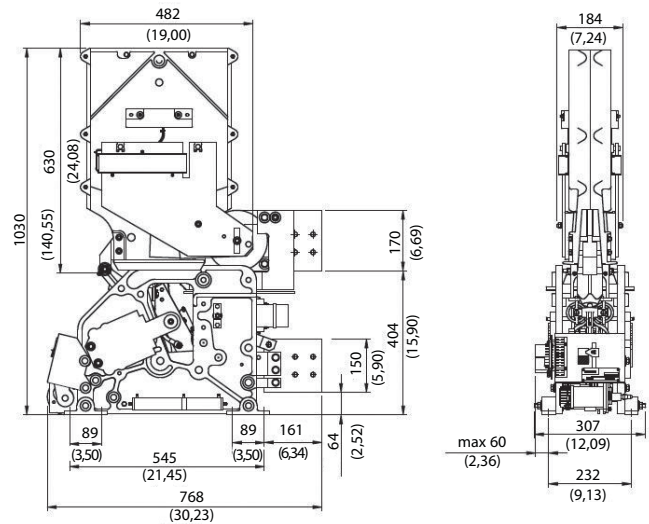

The breaker conforms to IEC61992; IEEE C37-14; IEEE C37-16

A special version of the IR6000F is with mechanical latching. This ensures an high withstand capability to the short circuit currents up to 150kA

Type	U _{max} [V]	I [A]	W [mm]	H [mm]	L [mm]
IR6000F Mechanical	up to 1200 (IEEE)	8000	340	1030	650
IR6080F	up to 3600	8000	340	1030	650
IR6040F	up to 3600	4000	300	1030	650